
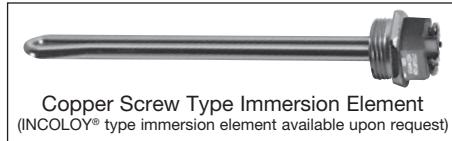


Residential Upright Electric Water Heater



Photo is of
RE250T6

FEATURING:

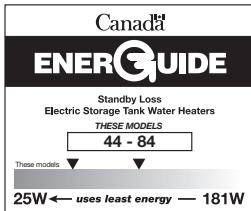

6 or 10-Year Limited Tank Warranties / 6 or 10-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada, and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

MANUFACTURED UNDER ONE OR MORE OF THE FOLLOWING U.S. PATENTS: 5,682,666; 7,634,976; 5,660,165; 5,954,492; 6,056,542; 6,935,280; 5,372,185; 5,485,879; 5,574,822; 7,971,560; 7,992,526; 6,684,821; 7,334,419; 7,866,168; 7,270,087; 7,007,748; 5,596,952; 6,142,216; 7,699,026; 5,341,770; 7,337,517; 7,665,211; 7,665,210; 7,063,132; 7,063,133; 7,559,293; 7,900,589; 5,943,984; 8,082,888; 5,988,117; 7,621,238; 7,650,859; 5,761,379; 7,409,925; 5,277,171; 8,146,772; 7,458,341; 2,262,174. OTHER U.S. AND FOREIGN PATENT APPLICATIONS PENDING. CURRENT CANADIAN PATENTS: 2,314,845; 2,504,824; 2,108,186; 2,143,031; 2,409,271; 2,548,958; 2,112,515; 2,476,685; 2,239,007; 2,092,105; 2,107,012. **Vitraglas®** and **Hydrojet®** are registered trademarks of Bradford White® Corporation.

Residential Upright Electric Water Heater

Upright Models

Model Number	Capacity		Standby Loss (Watts)	First Hour Rating (Gal.)	Recovery 90°F Rise*		A Floor to Heater Top	B Jacket Dia.	C Floor to Water Conn.	D C/L of Water Conn.	E Floor to T&P Conn.	G Water Conn. NPT	Approx. Shipping Weight
	U.S. Gal.	Imp. Gal.			U.S. GPH	Imp. GPH							
RE230S6	27	22	53	N/A	21	18	47	18	47 3/4	8	47 3/4	3/4	90
RE330S6	27	22	44	47	21	18	46 11/16	20	48 15/16	8	48 15/16	3/4	100
RE240S6	38	32	61	55	21	18	47 3/16	20	49 7/16	8	49 7/16	3/4	123
RE340S6	38	32	51	55	21	18	47 3/16	22	49 7/16	8	49 7/16	3/4	114
RE340T6	37	31	51	56	21	18	60 3/16	20	62 7/16	8	62 7/16	3/4	125
RE250S6	47	39	59	58	21	18	47 3/16	22	49 7/16	8	49 7/16	3/4	143
RE250T6	47	39	63	64	21	18	59	20	60 1/4	8	60 1/4	3/4	130
RE350S6	47	39	56	67	21	18	47 3/16	24	49 7/16	8	49 7/16	3/4	144
RE265T6	61	51	71	N/A	21	18	59 1/4	22	60 1/4	8	60 1/4	3/4	156
RE280T6	76	63	84	N/A	21	18	59 1/4	24	60 1/4	8	60 1/4	3/4	183

Model Number	Capacity		Standby Loss (Watts)	First Hour Rating (Litres)	Recovery 50°C Rise*		A Floor to Heater Top	B Jacket Dia.	C Floor to Water Conn.	D C/L of Water Conn.	E Floor to T&P Conn.	G Water Conn. NPT	Approx. Shipping Weight
	Litres	Standby Loss (Watts)			Litres/Hour	mm.							
RE230S6	102	53	N/A	79	1194	457	1213	203	1213	19	41		
RE330S6	102	44	178	79	1186	508	1243	203	1243	19	45		
RE240S6	140	61	208	79	1199	508	1256	203	1256	19	56		
RE340S6	140	51	205	79	1199	559	1256	203	1256	19	52		
RE340T6	140	51	212	79	1529	508	1586	203	1586	19	57		
RE250S6	178	59	220	79	1199	559	1256	203	1256	19	65		
RE250T6	178	63	242	79	1499	508	1530	203	1530	19	59		
RE350S6	178	56	254	79	1199	610	1256	203	1256	19	65		
RE265T6	231	71	N/A	79	1505	559	1530	203	1530	19	71		
RE280T6	288	84	N/A	79	1505	610	1530	203	1530	19	83		

If bottom cold water inlet kit is required, order part # 265-52904-00.

Standby loss (Watts) is based on top inlet location.

* Based on 4500W/4500W, Non-Simultaneous operation.


For 10 year models, change suffix "6" to "10"

Wattage Limitations for Simultaneous Operation	Voltage					Wattage Limitations for Non-Simultaneous Operation	Voltage				
	120V	208V	240V	277V	480V		120V	208V	240V	277V	480V
1500W / 1500W	yes	yes	yes	yes	yes	1500W / 1500W	yes	yes	yes	yes	yes
2000W / 2000W	no	yes	yes	yes	yes	2000W / 2000W	yes	yes	yes	yes	yes
2500W / 2500W	no	yes	yes	yes	yes	2500W / 2500W	yes	yes	yes	yes	yes
3000W / 3000W	no	yes	yes	yes	yes	3000W / 3000W	yes	yes	yes	yes	yes
3500W / 3500W	no	yes	yes	no	no	3500W / 3500W	no	yes	yes	no	no
4000W / 4000W	no	yes	yes	yes	yes	4000W / 4000W	no	yes	yes	yes	yes
4500W / 4500W	no	yes	yes	yes	yes	4500W / 4500W	no	yes	yes	yes	yes
5000W / 5000W	no	yes	yes	yes	yes	5000W / 5000W	no	yes	yes	yes	yes
5500W / 5500W	no	yes	yes	no	no	5500W / 5500W	no	yes	yes	no	no
6000W / 6000W	no	no	yes	yes	yes	6000W / 6000W	no	yes	yes	yes	yes

Wattage	Recovery ▲ GPH Temperature Rise °F					
	60	80	90	100	120	
1500W	10	8	7	6	5	
2000W	14	10	9	8	7	
2500W	17	13	11	10	9	
3000W	21	15	14	12	10	
3500W	24	18	16	14	12	
4000W	28	21	18	16	14	
4500W	31	23	21	19	15	
5000W	34	26	23	21	17	
5500W	38	29	25	23	19	
6000W	41	31	28	25	21	

Wattage	Recovery ▲ LPH Temperature Rise °C					
	34	45	50	56	67	
1500W	38	30	26	23	19	
2000W	53	38	34	30	26	
2500W	64	49	42	38	34	
3000W	79	57	53	45	38	
3500W	91	68	61	53	45	
4000W	106	79	68	61	53	
4500W	117	87	79	72	57	
5000W	129	98	87	79	64	
5500W	144	110	95	87	72	
6000W	155	117	106	95	79	

▲ (GPH/LPH based on Non-Simultaneous operation, when Simultaneous operation the GPH/LPH will approximately double.)

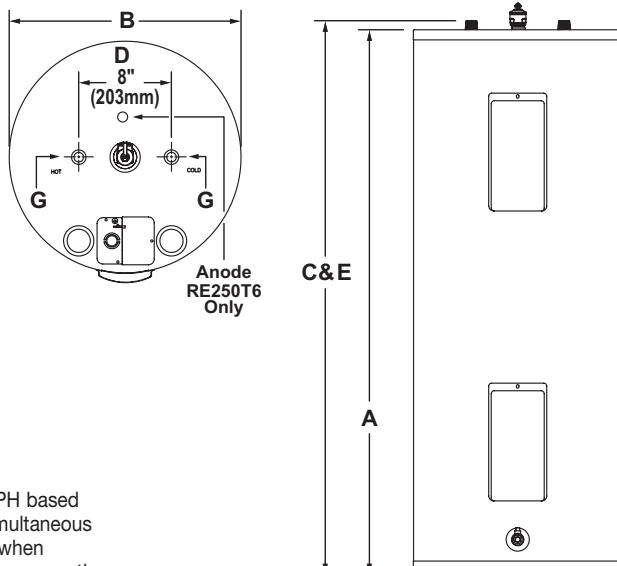

General:

All models ETL listed. These heaters are wired inter-locking (Non-Simultaneous, Single Phase) 240V with two 4500W elements, unless otherwise specified. All water and electrical connections are 3/4" NPT (19mm). All models certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa).

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

Customer Service / Sales: 1-866-690-0961 / 905-203-0600
24/7 Technical Support: 800-334-3393 ■ Email: techserv@bradfordwhite.com

Built to be the Best